

LED High Bay
4000-6000 K - 60 / 100 / 150 / 200 / 250W

110




Specificaties / Specifications:

60W 60/110° 7200 LUMEN	100W 60/110° 12000 LUMEN	150W 60/110° 18000 LUMEN	200W 60/110° 24000 LUMEN	250W 60/110° 30000 LUMEN	Metal or Polycarbonate cover
CRI 80>	Power Factor 0,95>	100-240 Volt	LED CREE XML	Meanwell Power Supply	3 / 5 year Warranty*

Producttoepassingen / Product applications:


Neutral White 4000-4500K	Cold White 6000-6500K	Magazijnen Warehouse	Productie Production	Showrooms
--------------------------------	-----------------------------	-------------------------	-------------------------	-----------

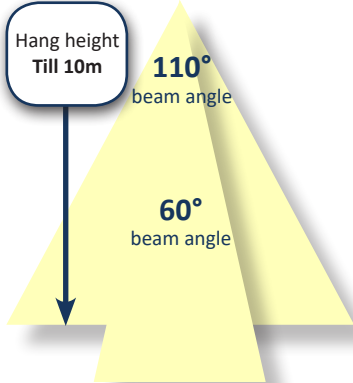

LED High-Bay
110°

LED Wattage	∅	Lumen	Lumen/Watt	Convent. Wattage	Energy saving	Saving	Lifetime
60W	498 mm	7200	110-120	300W	240W	80%	50.000 h
100W	498 mm	12000	110-120	300W	200W	67%	50.000 h
150W	498 mm	18000	110-120	480W	330W	69%	50.000 h
200W	498 mm	24000	110-120	480W	280W	58%	50.000 h
240W	498 mm	30000	110-120	480W	240W	50%	50.000 h

110° High Bay

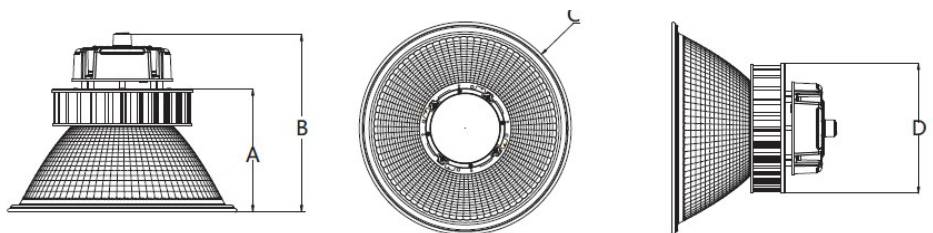

Capacity	A	B	C	D
60W	246,7 mm	328,5 mm	338 mm	211 mm
100W	266,5 mm	348,5 mm	338 mm	211 mm
150W	296,7 mm	378,5 mm	338 mm	211 mm
200W	346,7 mm	428,5 mm	338 mm	211 mm
250W	346,7 mm	428,5 mm	338 mm	211 mm

* 5 Year Warranty: operating hours: ≤14 hours a day / 6 days per week
3 Year Warranty: operating hours: >14 hours a day / 6 days per week