


I1

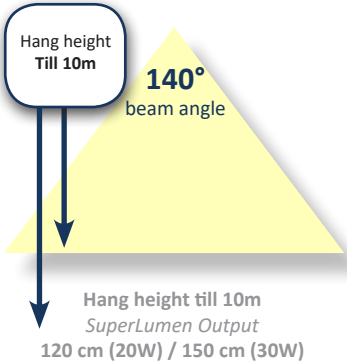

Specificaties / Specifications:

150 LM/W*	120 cm 2700 LUMEN* 18W	120/150 cm 3000 LUMEN* 20W	150 cm 3300 LUMEN* 22W	150 cm 3750 LUMEN* 25W	150 cm 4500 LUMEN* 30W
CRI 82-85	Power Factor 0,93 - 0,96	Cap Base G13 Rotatable	LED 2835 Epistar Taiwan	Operating Temp. -25°C ~ +55°C	5 year** Warranty

Producttoepassingen / Product applications:

3000-3500K 4000-4500K 6000-6500K	Magazijnen Warehouses	Productie Production	Schadeherstel
---	---------------------------------	--------------------------------	----------------------




120 cm
RetroFix™ Premium
Super Lumen

150 cm
RetroFix™ Premium
Super Lumen

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
18W	1200 mm	2700	150	43W	26W	60%	50.000 h
20W	1200 mm	3000	150	43W	23W	53%	50.000 h

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
20W	1500 mm	3000	150	70W	50W	71%	50.000 h
22W	1500 mm	3300	150	70W	48W	69%	50.000 h
25W	1500 mm	3750	150	70W	45W	64%	50.000 h
30W	1500 mm	4500	150	70W	40W	57%	50.000 h

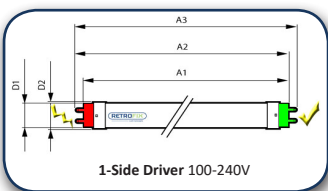

Product dimensions	A1	A2	A3	D1	D2
RetroFix™ LED 60 cm	589	596	603	25	27
RetroFix™ LED 120 cm	1198	1205	1212	25	27
RetroFix™ LED 150 cm	1498	1507	1514	25	27

* Lumens are nominal values. Capacity and Lumens have a tolerance of +/- 5-10%.
 ** 5 Year Warranty: operating hours: ≤14 hours a day / 6 days per week
 ** 3 Year Warranty: operating hours: >14 hours a day / 6 days per week

Breda Lighting International BV is a licensee under:

PHILIPS LED Luminares and Retrofit Bulbs Licensing Program
 For further information on the latter, visit www.ip.philips.com/licensing/ssl

