


12

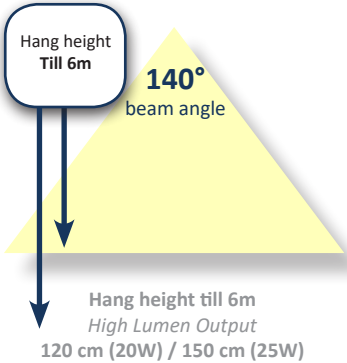

Specificaties / Specifications:

120 LM/W*	120 cm 2160 LUMEN* 18W	150 cm 2400 LUMEN* 20W	150 cm 2640 LUMEN* 22W	120 cm 2400 LUMEN* 20W	150 cm 3000 LUMEN* 25W
CRI 82-85	Power Factor 0,93 - 0,96	Cap Base G13 Rotatable	LED 2835 Epistar Taiwan	Operating Temp. -25°C ~ +55°C	5 year** Warranty

Producttoepassingen / Product applications:

3000-3500K 4000-4500K 6000-6500K	Kantoren Offices	Scholen Schools	Zorg Health	Productie Production	Available with Motion Sensor Induction Time: 60s Static Output: 2-4W
---	----------------------------	---------------------------	-----------------------	--------------------------------	--



60 cm
RetroFix™ Economy
High Lumen


RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
10W	600 mm	1200	120	22W	12W	55%	50.000 h

120 cm
RetroFix™ Economy
High Lumen

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
18W	1200 mm	2160	120	43W	26W	60%	50.000 h
20W	1200 mm	2400	120	43W	23W	53%	50.000 h

150 cm
RetroFix™ Economy
High Lumen

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
20W	1500 mm	2400	120	70W	50W	71%	50.000 h
22W	1500 mm	2640	120	70W	48W	69%	50.000 h
25W	1500 mm	3000	120	70W	45W	64%	50.000 h



Product dimensions	A1	A2	A3	D1	D2
RetroFix™ LED 60 cm	589	596	603	25	27
RetroFix™ LED 120 cm	1198	1205	1212	25	27
RetroFix™ LED 150 cm	1498	1507	1514	25	27

* Lumens are nominal values. Capacity and Lumens have a tolerance of +/- 5-10%.
 ** 5 Year Warranty: operating hours: ≤14 hours a day / 6 days per week
 ** 3 Year Warranty: operating hours: >14 hours a day / 6 days per week

Breda Lighting International BV is a licensee under:

PHILIPS LED Luminaires and Retrofit Bulbs Licensing Program
 For further information on the latter, visit www.ip.philips.com/licensing/ssl

