


13



Specificaties / Specifications:

130 LM/W*	150 cm 2860 LUMEN 22W	150 cm 3900 LUMEN 30W	5 year** Warranty
CRI 75-80	Power Factor 0,92 - 0,96	IP66 / HACCP	Cap Base G13 Twistable
		LED 2835 1 ROW Epistar Taiwan	Operating Temp. -25°C ~ +55°C

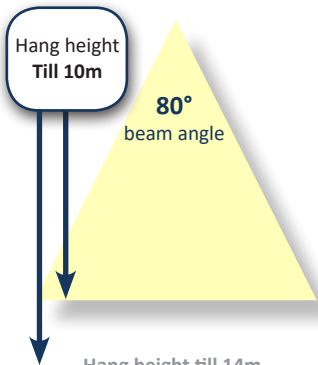

Producttoepassingen / Product applications:


Cold White 6000-6500K	Magazijnen Warehouse	Productie Production	Koelhuizen Coldstorage
---------------------------------	---------------------------------------	---------------------------------------	-----------------------------------------



150 cm
RetroFix™ Premium
SMD 80° LED

30W
Hang height
till 14m

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
22W	1500 mm	2860	130	70W	48W	69%	50.000 h
30W	1500 mm	3900	130	70W	40W	57%	50.000 h

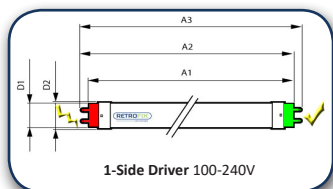

Product dimensions	A1	A2	A3	D1	D2
RetroFix™ LED 60 cm	589	596	603	25	27
RetroFix™ LED 120 cm	1198	1205	1212	25	27
RetroFix™ LED 150 cm	1498	1507	1514	25	27

* Lumens are nominal values. Capacity and Lumens have a tolerance of +/- 5-10%.
 ** 5 Year Warranty: operating hours: ≤14 hours a day / 6 days per week
 *** 3 Year Warranty: operating hours: >14 hours a day / 6 days per week

Breda Lighting International BV is a licensee under:

PHILIPS LED Luminares and Retrofit Bulbs Licensing Program
 For further information on the latter, visit www.ip.philips.com/licensing/ssl

