


14

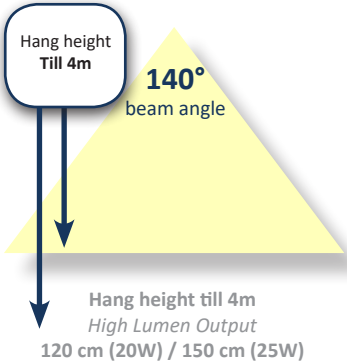

### Specificaties / Specifications:

<b>100</b> LM/W*	<b>120 cm</b> 1800 LUMEN* <b>18W</b>	<b>150 cm</b> 2000 LUMEN* <b>20W</b>	<b>150 cm</b> 2200 LUMEN* <b>22W</b>	<b>120 cm</b> 2000 LUMEN* <b>20W</b>	<b>150 cm</b> 2500 LUMEN* <b>25W</b>
<b>CRI</b> 82-85	Power Factor <b>0,93 - 0,96</b>	Cap Base G13 Rotatable	<b>LED 2835</b> Epistar Taiwan	Operating Temp. -25°C ~ +55°C	<b>3 year</b> Warranty

### Producttoepassingen / Product applications:

<b>3000-3500K</b> <b>4000-4500K</b> <b>6000-6500K</b>	<b>Kantoren</b> Offices	<b>Scholen</b> Schools	<b>Zorg</b> Health
---	----------------------------	---------------------------	-----------------------



**60 cm**  
**RetroFix™ Basic**  
Standard Lumen


RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
10W	600 mm	1000	120	22W	12W	55%	30.000 h

**120 cm**  
**RetroFix™ Basic**  
Standard Lumen

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
18W	1200 mm	1800	120	43W	26W	60%	30.000 h
20W	1200 mm	2000	120	43W	23W	53%	30.000 h

**150 cm**  
**RetroFix™ Basic**  
Standard Lumen

RetroFix™ Wattage	Length	Lumen	Lumen/Watt	TL Wattage (incl CVSA)	Energy saving	Saving	Lifetime
20W	1500 mm	2000	120	70W	50W	71%	30.000 h
22W	1500 mm	2200	120	70W	48W	69%	30.000 h
25W	1500 mm	2500	120	70W	45W	64%	30.000 h

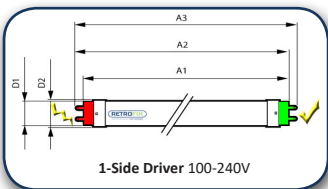

Product dimensions	A1	A2	A3	D1	D2
RetroFix™ LED 60 cm	589	596	603	25	27
RetroFix™ LED 120 cm	1198	1205	1212	25	27
RetroFix™ LED 150 cm	1498	1507	1514	25	27

\* Lumens are nominal values. Capacity and Lumens have a tolerance of +/- 5-10%.

Breda Lighting International BV is a licensee under:

**PHILIPS LED Luminaires and Retrofit Bulbs Licensing Program**  
For further information on the latter, visit [www.ip.philips.com/licensing/ssl](http://www.ip.philips.com/licensing/ssl)

