


R6

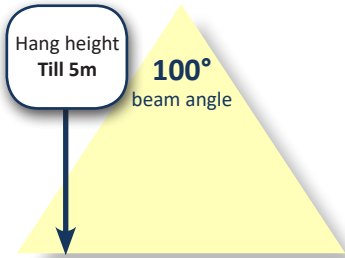

LED Downlight
3000 / 4000 / 6000 K - 100°

Specificaties / Specifications:

9W 911 LUMEN	16W 1593 LUMEN	21W 2100 LUMEN	LED 3030 Nichia	Ceiling Light Price on Request 10W / 15W / 22W	3 / 5 year** Warranty
CRI 80 >	Power Factor 0,90 >	IP20 / HACCP	100-240 Volt	Dimmable 1-10V / DALI / Triac Price on Request 9W Ø164mm 15W Ø245mm	

Producttoepassingen / Product applications:

Warm White 3000-3500K	Neutral White 4000-4500K	Cold White 6000-6500K	Kantoren Offices	Gangen Corridors	Recepties Reception
------------------------------------	---------------------------------------	------------------------------------	----------------------------	----------------------------	-------------------------------



9W
LED Downlight


LED Wattage	Ø	Lumen	Lumen/Watt	PLC Wattage (incl CVSA)	Energy saving	Saving	Lifetime
9W	217 mm	911	100	2x15W	21W	70%	50.000 h

16W
LED Downlight

LED Wattage	Ø	Lumen	Lumen/Watt	PLC Wattage (incl CVSA)	Energy saving	Saving	Lifetime
16W	217 mm	1593	100	2x22W	29W	64%	50.000 h

21W
LED Downlight

LED Wattage	Ø	Lumen	Lumen/Watt	PLC Wattage (incl CVSA)	Energy saving	Saving	Lifetime
21W	217 mm	1999	100	2x31	41W	66%	50.000 h

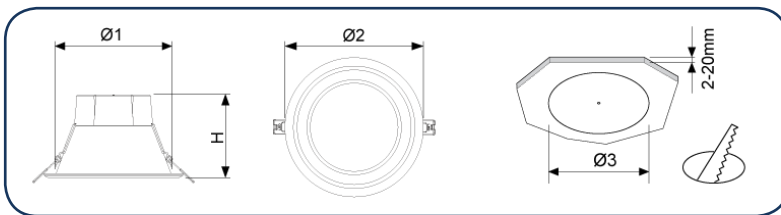

Product dimensions	Ø1	Ø2	Ø3	H
LED DL 9W	193	217	200	110
LED DL 16W	193	217	200	110
LED DL 21W	193	217	200	110
DIMM Flat DL 9W	164	164	155	11
DIMM Flat DL 15W	245	245	230	11

* Lumens are nominal values. Capacity and Lumens have a tolerance of +/- 5-10%.
 ** 5 Year Warranty: operating hours: ≤14 hours a day / 6 days per week
 *** 3 Year Warranty: operating hours: >14 hours a day / 6 days per week