

TABLE OF CONTENTS

WELDING BLANKETS & CURTAINS

Weldingscreen	307
Welding curtains	308
Curtain	310
Rails for welding curtains	310
Protective umbrellas	311
Welding umbrellas	311
Welding cushions	311
Welding tent	311
Heat resistant glasfiber cloth and sparkshie	312
Automotive welding blankets	314


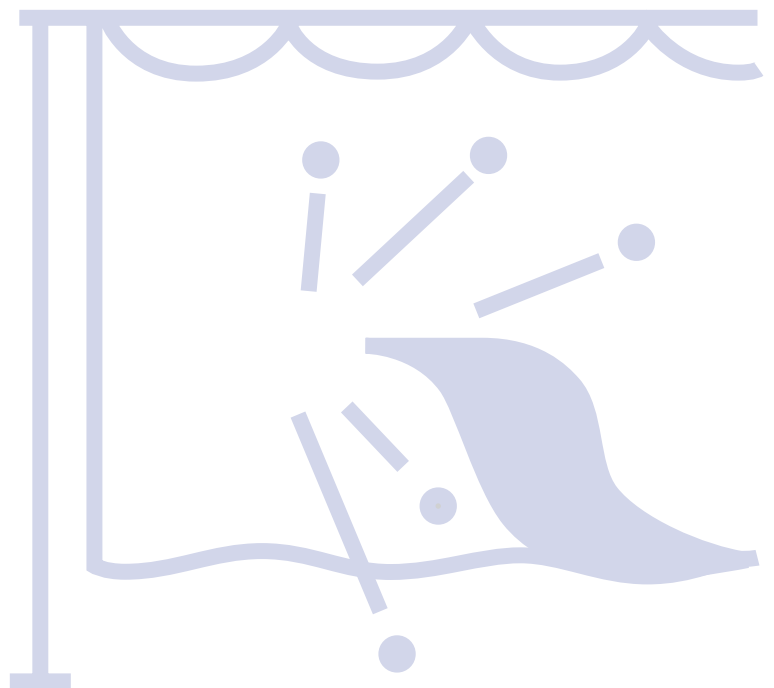


TABLE OF CONTENTS
WELDING BLANKETS & CURTAINS

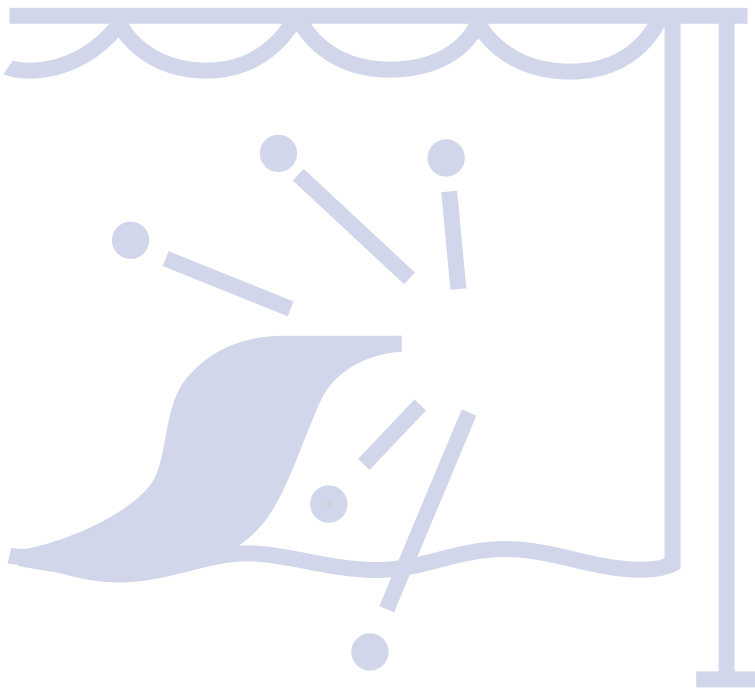

69

WELDING BLANKETS & CURTAINS

Weldsafe welding screen



Weldsafe 180 x 180cm welding screen including welding curtain.
Available in orange and green. 174 x 174cm.
Includes eyelets.
Easy to assemble.
The frame comes with wheels.

DIN EN 1598:2002-04


Product nr	Description	Packing
69.55.16066	Welding screen orange.	1/1
69.55.18066	Welding screen green.	1/1
69.55.18266	Frame for curtain 180x180cm.	1/1
69.40.10000	Metal rings for welding curtain, pack 25 pcs.	1/1
69.40.16066	Welding curtain 174x174cm orange.	1/1
69.40.18066	Welding curtain 174x174cm green shade 9.	1/1

Welding screen with welding curtain without swiveling wheels



Welding screen with 2 welding curtains, 2.3 meter wide, without swivel wheels.

Product nr	Description	Packing
69.55.36742	Welding screen with 2 green welding curtains, 2.3 meter wide, without swivel wheels.	1/1
69.55.36744	Welding screen with 2 orange welding curtains, 2.3 meter wide, without swivel wheels.	1/1
69.55.36746	Welding screen with 2 transparant curtains, 2.3 meter wide without swivel wheels.	1/1



WELDING BLANKETS & CURTAINS

Welding screen with welding curtains, swivel arms and swivel wheels



Wedlingscreen with weldingcurtains and 2 swivel arms, 4.5 meter wide with swivel wheels.

Product nr	Description	Packing
69.55.37712	Welding screen with green welding curtains and 2 swivel arms, 4.5 meter wide, with swivel wheels.	1/1
69.55.37714	Welding screen with orange welding curtains and 2 swivel arms, 4.5 meter wide, with swivel wheels.	1/1
69.55.37717	Welding screen with transparant curtains and 2 swivel arms, 4.5 meter wide with swivel wheels.	1/1

Swivel arm with welding curtain




Swivel arm with curtain strips, 1.10 meter wide.

Product nr	Description	Packing
69.55.36792	Swivel arm with green curtain strips, 1.10 meter wide.	1/1
69.55.36794	Swivel arm with orange curtain strips, 1.10 meter wide.	1/1
69.55.36796	Swivel arm with transparant curtain strips, 1.10 meter wide.	1/1

Spare parts for Vlamboog welding curtain standard delux

Product nr	Description	Packing
69.55.36508	Assembly clip for curtain strips, plastic, for 1 inch pipe, with 2 assembly points.	1/50
69.55.37705	Swivel arm 1095 mm, suitable for 1 welding curtain of 1800 mm high and 1400 mm wide, or 4 strips of 300 mm wide.	1/1
69.55.37711	Swiveling wheel, with bolt and nut.	1/1
69.55.37716	Swiveling wheel with brake, with bolt and nut.	1/1



WELDING BLANKETS & CURTAINS

Welding curtains green shade 9



Welding curtains protect the eyes against the welding arc whilst the welder remains visible for his colleagues and supervisor. When used in vertical position the curtain is resistant to welding spatters and grinding sparks. Has fully welded seams and has reinforced eyelets for the curtain hooks. Can be joined together with the snap-on joints. The curtains are resistant to normal tear and wear. Flexible and weather resistant, thickness approximately 0.4 mm.

- Green shade 9 for electric welding, DIN approved.
- Prevents blinding.
- Spark resistant, flame retardent.
- Provide better light and sight in the working place.
- Energy-saving.
- Keep out noise, dust, dirt, moist and cold.
- Well resistant against most oil, grease, acids and lye.

EN-ISO 25980: 2015

Product nr	Description	Packing
69.40.31160	Welding curtains green shade 9, 160 x 140 cm, with mat coating on one side.	1/10
69.40.31180	Welding curtains green shade 9, 180 x 140 cm, with mat coating on one side.	1/10
69.40.31200	Welding curtains green shade 9, 200 x 140 cm, with mat coating on one side.	1/10
69.40.31220	Welding curtains green shade 9, 220 x 140 cm, with mat coating on one side.	1/10
69.40.31240	Welding curtains green shade 9, 240 x 140 cm, with mat coating on one side.	1/10
69.40.31260	Welding curtains green shade 9, 260 x 140 cm, with mat coating on one side.	1/10
69.40.31280	Welding curtains green shade 9, 280 x 140 cm, with mat coating on one side.	1/10

Welding curtains orange




Welding curtains protect the eyes against the welding arc whilst the welder remains visible for his colleagues and supervisor. When used in vertical position the curtain is resistant to welding spatters and grinding sparks. Has fully welded seams and has reinforced eyelets for the curtain hooks. Can be joined together with the snap-on joints. The curtains are resistant to normal tear and wear. Flexible and weather resistant, thickness approximately 0.4 mm.

- Orange for autogeneous welding.
- Prevents blinding.
- Spark resistant, flame retardent.
- Provide better light and sight in the working place.
- Energy-saving.
- Keep out noise, dust, dirt, moist and cold.
- Well resistant against most oil, grease, acids and lye.

EN-ISO 25980: 2015

Product nr	Description	Packing
69.40.35160	Welding curtains orange, 160 x 140 cm, two sides shiny.	1/10
69.40.35180	Welding curtains orange, 180 x 140 cm, two sides shiny.	1/10
69.40.35200	Welding curtains orange, 200 x 140 cm, two sides shiny.	1/10
69.40.35220	Welding curtains orange, 220 x 140 cm, two sides shiny.	1/10
69.40.35240	Welding curtains orange, 240 x 140 cm, two sides shiny.	1/10
69.40.35260	Welding curtains orange, 260 x 140 cm, two sides shiny.	1/10
69.40.35280	Welding curtains orange, 280 x 140 cm, two sides shiny.	1/10



WELDING BLANKETS & CURTAINS

Welding curtains clear transparent



Welding curtains protect the eyes against the welding arc whilst the welder remains visible for his colleagues and supervisor. When used in vertical position the curtain is resistant to welding spatters and grinding sparks. Has fully welded seams and has reinforced eyelets for the curtain hooks. Can be joined together with the snap-on joints. The curtains are resistant to normal tear and wear. Flexible and weather resistant, thickness approximately 0.4 mm.

- Clear transparent for grinding.
- Prevents blinding.
- Spark resistant, flame retardent.
- Provide better light and sight in the working place.
- Energy-saving.
- Keep out noise, dust, dirt, moist and cold.
- Well resistant against most oil, grease, acids and lye.

EN-ISO 25980: 2015

Product nr	Description	Packing
69.40.36160	Welding curtains clear transparent, 160 x 140 cm, two sides shiny.	1/10
69.40.36180	Welding curtains clear transparent, 180 x 140 cm, two sides shiny.	1/10
69.40.36200	Welding curtains clear transparent, 200 x 140 cm, two sides shiny.	1/10
69.40.36220	Welding curtains clear transparent, 220 x 140 cm, two sides shiny.	1/10
69.40.36240	Welding curtains clear transparent, 240 x 140 cm, two sides shiny.	1/10
69.40.36260	Welding curtains clear transparent, 260 x 140 cm, two sides shiny.	1/10
69.40.36280	Welding curtains clear transparent, 280 x 140 cm, two sides shiny.	1/10

Curtain strips



Curtain strips simplify the flow of goods and people through the separation of a welding area. The strips cover the area in a suitable manner and limit the required opening to the size of the person and goods coming through. The strips can be supplied on desired lengths.

EN-ISO 25980: 2015


Product nr	Description	Meter
69.40.36412	Green colour 9, 300 x 2 mm.	1/50
69.40.36413	Green colour 9, 300 x 3 mm.	1/50
69.40.36414	Orange, 300 x 2 mm.	1/50
69.40.36415	Clear transparent, 300 x 2 mm.	1/50

Rails for welding curtains



Heavy duty curtain rail and assembly parts for fastly and easily arranging separations for shielding working areas from wind, dust and liquids and to create cabins for welding and grinding.

Product nr	Description	Packing
69.55.25000	Welding curtain rail, galvanised steel, size 25 x 24 mm, length 3 meter.	3
69.55.25050	Angle 90°, radius 650 mm.	1
69.55.25100	Nylon roller for curtain rail.	10
69.55.25120	Rubber end for curtain rail.	10
69.55.25130	Ceiling support for curtain rail, 69 x 40 x 2 mm.	10
69.55.25160	Connector for curtain rail, length 9 cm, complete with bolts.	10
69.55.25175	Heavy steel curtain hook, for heavy curtains.	1



WELDING BLANKETS & CURTAINS

Protective umbrellas



Protective umbrella with bendable mast. Made of double coated nylon fabric in weavelock. A perfect protection against rain and wind. Umbrella diameter Ø 2,2 meter.

EN 343

Product nr	Description	Packing
69.40.40998	Protective umbrella, nylon fabric.	1/10
69.40.40920	Protective umbrella with bendable mast, 2.0 m diameter, colour kaki.	1/10

Welding umbrellas



Welding umbrella with bendable mast and 10 ribs with diameter of 4,5 mm, with a sturdy mast with a 1,5 mm wall thickness (inner diameter 29 mm, outer diameter 32 mm). With waterproof, mould resistant and flame retarding cotton. Colour blue.

EN 343 & EN-ISO 14116, class M2

Product nr	Description	Packing
69.40.40925	Welding umbrella, 2.5 m diameter.	1/4
69.40.40930	Welding umbrella, 3.0 m diameter.	1/1

Welding cushions



Welding cushions, cow split leather with Kevlar stitching.

Product nr	Description	Packing
69.65.20001	Leather cushion with one-side aluminium coating, 50 x 50 x 8 cm.	1/1
69.65.20005	Welding cushion without Alu-coating 50 x 50 x 6 cm.	1/1


Welding tent



The house-model has a 2x2x2m size. At the front and at the back the fabric can be opened. The opening can be closed by means of eyelets. The stability is improved thanks to the 20 cm protective seams. This canvas is made from flame-retardant, water-repellent polyester, with both sides coated pvc.

The welding tent is available with or without metal frame.

Product nr	Description	Packing
69.49.40010	Welding tent inclusive metal frame.	1/1
69.49.40011	Welding tent exclusive metal frame.	1/1



WELDING BLANKETS & CURTAINS

Sparkshield glass fibre cloth type K, weight 690g/m²



Coated with polyurethane on one side, grey in colour. Temperature 550°C. Thickness 0.7mm. Catches welding droplets; extremely suitable for a durable welding and grinding curtain. Available on 25 x 1m rolls.

Product nr	Description	Mt/packing
69.49.20000	Glasfiber Sparkshield type K.	1/25

Sparkshield welding blanket type LO, weight 450 g/m²



Coated with polyurethane on one side, grey in colour. Temperature 550°C. Thickness 0.45mm. Catches welding droplets; extremely suitable for a durable welding and grinding curtain. Available on 50 x 1m rolls.


Product nr	Description	Mt/packing
69.49.20005	Glasfiber Sparkshield type LO.	1/25

Sparkshield welding blanket type SL, weight 570g/m²



Coated on both sides with silicone rubber, grey in colour. Temperature 630°C. Thickness 0.55mm. Protection against sparks and spatters, light welding or protective blanket. Available on 25 x 1m rolls.

Product nr	Description	Mt/packing
69.49.20010	Sparkshield type SL.	1/25



WELDING BLANKETS & CURTAINS

Sparkshield welding blanket type A, weight 720g/m²



Coated with polyurethane on both sides, grey in colour. Temperature 600°C. Thickness 0.8mm. Protection against sparks and spatters, collects welding droplets; extremely suitable as a durable welding and grinding curtain. Available on 25 x 1m rolls.

Product nr	Description	Mt/packing
69.49.20020	Glass fibre cloth Sparkshield type A.	1/25

Sparkshield welding blanket type SZ, weight 1080g/m²



Coated with silicone rubber on both sides, grey in colour. Temperature 980°C. Thickness 1.0mm. Collection of welding droplets and liquid steel when gouging and cutting, durable welding blanket. Available on 50 x 1m rolls.


Product nr	Description	Mt/packing
69.49.20050	Glass fibre cloth Sparkshield type SZ.	1/25

Sparkshield welding blanket type H, weight 1100g/m²



Coated with polyurethane on both sides, as well as a high temperature coating for short-term high pressure. Gold in colour. Temperature 750°C, short-term temperature 900°C. Thickness 1.7mm. Collection of welding droplets; extremely suitable for a durable welding and grinding curtain. Available on 25 x 1m rolls.

Product nr	Description	Mt/packing
69.49.20060	Glass fibre cloth Sparkshield type H.	1/25



WELDING BLANKETS & CURTAINS

Sparkshield welding blanket type O, weight 1250g/m²



Coated with silicate fabric on both sides, as well as a high temperature coating to minimise fraying. Available in white gold colour. Temperature 1100°C, short-term up to approximately 1600°C. Thickness 1.4mm. Collection of welding droplets and gouging; extremely suitable for working under extreme conditions. Available on 50 x 0.91m rolls.

Product nr	Description	Mt/packing
69.49.20080	Glasfiber cloth Sparkshield type O	1/50

Glass fabric Tyglas, weight 1100g/m²



Glass fabric Tyglas, special coated woven glass fabric, colour brown, 100 cm wide, 1100g/m², thickness 1,5 mm, supplied per meter. Suitable for heavy duty welding and grinding with a continuous temperature of 1000°C and a maximum temperature of 1200°C.

Product nr	Description	Mt/packing
69.49.51398	Glass fabric Tyglas, 1,5 mm, 1100 g/m ² .	1/50

Automotive welding blankets



Automotive welding blankets made of heat resistant Tyglas VC (aluminium coating). The blankets are used in the car repair shops to protect a car when it is being welded on.

Product nr	Description	Packing
69.49.60220	Automotive welding blankets, 2 x 2 meter	1/1

